



MULTI-FAMILY PRODUCTS


Providing The Utmost Style And Performance



PROTECTOR GLASS

For Noise Reduction And Increased Security

Sound Transmission Class or STC Rating, is a unit of measure describing how much sound is diminished across a partition or window. The higher the STC rating, the higher the noise reduction. Protector laminated doorglass has an STC rating up to 35. Ideal for multifamily housing, urban areas and housing near airports or highways.

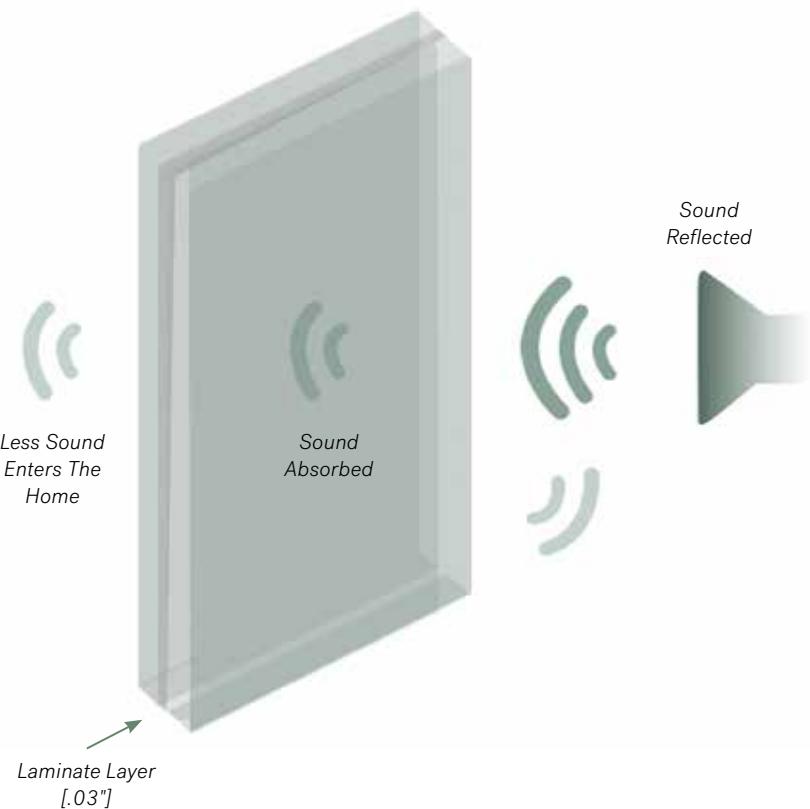

STC 29
Without
Protector



22x64
Steel or
Fiberglass Doors

STC 35
With
Protector



22x64
Steel or
Fiberglass Doors

AVAILABLE IN:

COMMODITY

PRIVACY GLASS

BBG

GBG

SDL

DECORATIVE

*Include a "P" after
the part number to
add Protector glass.*



ADA DOORGLASS

Opens The Door To Everyone

RSL is pleased to offer two doorglass sizes that are Americans with Disabilities Act (ADA) compliant. 22 x 60 white frames for 6' 8" doors and 22 x 76 white frames for 8' doors. Both sizes are 1-lite injection molded frames which offer any GBG configuration.



3060BK
22x60



3060GBG-WBK
22x60



3076BK
22x76



3076GBG-WBK
22x76



Door surfaces within 10 inches of the floor or ground must be a smooth surface on the push side extending the full width of the door.

← No hardware above 48"

← No projections into the opening below 34"

10" clear surface area

COMMODITY SELECTIONS

Clear and Low-E



1-LITE

22 x 60

1-LITE

22 x 64

GBG 10 LITE

22 x 64

GBG 15 LITE

22 x 64

GLIDE INTERNAL BLINDS

22 x 64



1-LITE

22 x 76

1-LITE

22 x 80

GBG 12-LITE

22 x 80

GBG 18 LITE

22 x 80

GLIDE INTERNAL BLINDS

22 x 80



A Novatech® Company

800 257-8641 | RSLINC.com